

NORRIS FI 700

code: 98-500




Same footprint as the BT700

FEATURES

- **Warranty** – 2 years parts and labour, 5 years on the cabinet (see p.28 for conditions & extended warranty offer)
- Made tough in our factory in Caves Beach NSW
- Robust 304 Stainless steel handmade cabinet
- Heating boiler made from Type 316 stainless steel
- Stainless steel wash and rinse arms
- Large 304 Stainless Steel Filters / Scrap Trays
- **Electromechanically Controlled Operation**
- **Connects to cold water**
- Robust 880W German Wash Pump
- Reliable European heating elements made from Incoloy® 825, resistant to corrosion and cracking - elements last longer
- Ergonomic pass-through dishwasher
- Recirculating wash system
- 90 second cycle
- Hood safety cut out switch
- Rinse temperature controlled by thermostop function for sanitation compliance
- Large useable wash height 450 mm
- Drain pump for easy installation
- No Stem pipe = safe, easy operation, improved WH&S
- Easy servicing access
- Three phase power connection (optional conversion to single phase 20amp)
- Optional Steam Condenser available

INCLUSIONS

- 2 x Plate racks 500mm x 500mm
- 1 x Cup rack 500mm x 500mm
- 1 x Cutlery container
- 1 x Water connection hose
- 1 x External Seko WD35 detergent/rinse aid injection dosing system

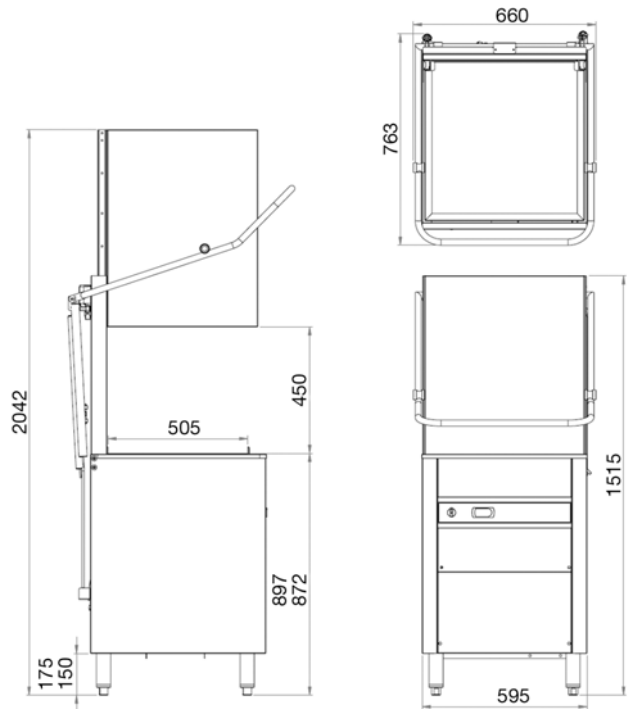

TECHNICAL DATA

Height	
Cabinet inc. legs	1515 mm
With hood extended	2042 mm
Usable Wash	450 mm
Width	
Cabinet	595 mm
Inc. handle	700 mm
Depth	
Cabinet	633 mm
Inc. handle	763 mm
Capacities	
Loads/Hour	40*
Water per Cycle	2.5 L**
Wash Pump	880W
Wash Tank Litres	25
Boiler Litres	6
Element (wash)	3,000W
Element (boiler)	10,600W
Dosing system	External Dual Dosing system
Temperatures	
Wash Degrees C	65 °C
Rinse Degrees C	88 °C
Plumbing	
Drain Water	Smart Drain Pump ¾" BSP (cold)
Electrical	
Volts/Hz/Phase	415 V AC/50Hz/3+N
Current	20 A/Phase

* Subject to incoming water temperature 20°C

** Subject to incoming water pressure

Water pressure requirements are: 10L/min at 200-400 kPa max.