




UNDERBENCH

NORRIS AP500

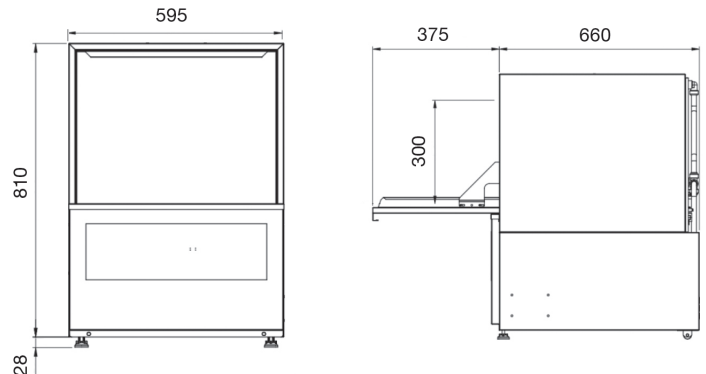

FEATURES

- **Warranty:** 2 years parts and labour, 5 years on the cabinet & control board (see p.26 for conditions & extended warranty offer)
- Compact underbench dishwasher suited for cafes and restaurants.
- Made tough in our factory in Caves Beach NSW
 - Robust 304 Stainless steel hand made cabinet
 - Heating Boiler made from Stainless steel 316
 - Stainless steel wash and rinse arms
 - Large 304 Stainless Steel Filters / Scrap Trays
- **Connects to cold water and is always ready** (no waiting once machine is at operating temperature)
- Reliable German electrical contactors
- Reliable European heating elements made from the Incoloy® 825, highly resistant to corrosion and cracking so the elements last longer
- Recirculating wash system
- Cleans 600 plates per hour
- 1, 2 & 5 minute wash cycle options
- 15 Amp power connection
- Automatic detergent and rinse aid injection
- Rear rollers for easy machine inspection
- Rinse temperature controlled by thermostop function for sanitation compliance
- Useable wash height 300mm
- Double skinned door reducing heat and noise pollution
- Standard drain pump for easy installation
- Easy servicing access for minimal disruption

INCLUSIONS

- 1 x Flat rack insert 500mm x 500mm
- 1 x Plate rack insert 500mm x 500mm
- 1 x Cutlery container
- 1 x Water connection hose
- 2 x Chemical weights & filters
- 2 x Adjustable + 2 x Roller feet
- 1 x Operating manual

TECHNICAL DATA

Height

Cabinet	810 mm
Cabinet inc. legs	838 mm
Usable Wash	300 mm

Width

Cabinet	595 mm
---------	--------

Depth

Cabinet	660 mm
With door open	1035 mm

Capacities

Loads/Hour	up to 45*
Water per Cycle	2.5L**
Wash Pump	370W
Wash Tank Litres	18
Boiler Tank Litres	6
Element (wash)	3000W
Element (boiler)	3600W
Detergent Injection	yes
Rinse Aid Injection	yes

Temperatures

Wash Degrees C	65 °C
Rinse Degrees C	88 °C

Plumbing

Drain Water	Pump out ½" BSP (cold)
-------------	---------------------------

Electrical

Volts/Hz	240V AC/50Hz
Max. Amp. load	15amps

Note: this machine has load shedding capability

* Subject to incoming water temperature 20°C

** Subject to incoming water pressure



Water pressure requirements are: 10L/min at 200-400 kPa max.