


RACK CONVEYORS

IR120

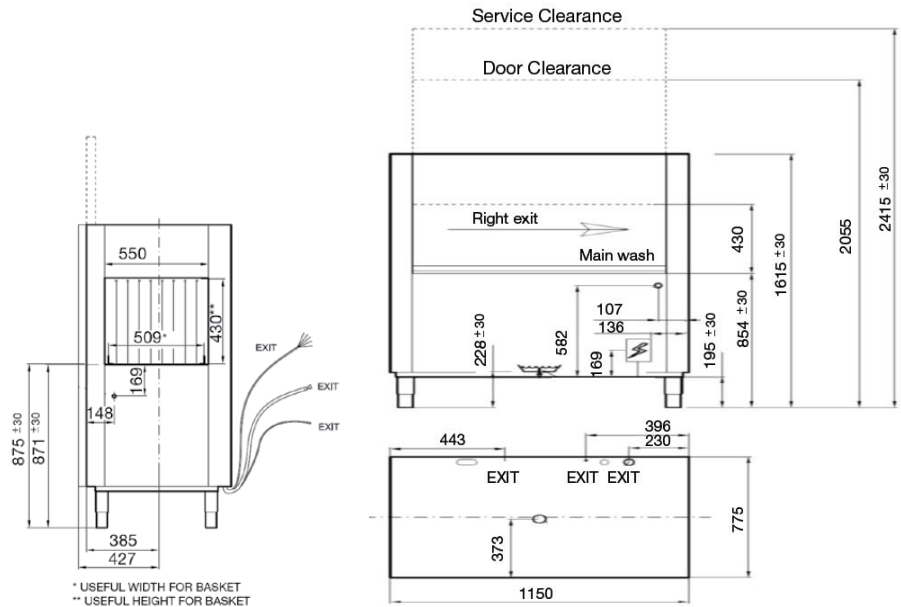

Note: Optional drying unit available

The high powered IR120 rack conveyor speeds through dirty crockery with ease with the ability to complete up to 120 racks per hour!

FEATURES

- **Warranty - 3 years on the control board, 2 years parts and labour on the remainder of the machine**
- Powerful 10500W wash tank element
- Cleans up to 120 racks per hour
- Double flow wash pump
- Rinse pump to ensure rinse pressure is maintained
- Double skinned door insulation for heat retention
- Ergonomic design
- Recirculating wash system
- 3 wash cycle options
- Three phase power
- Deep drawn tank construction
- Rapid recovery boiler for faster turnaround
- Rinse temperature accurately controlled by the thermostop function
- Easy service access minimising maintenance disruption
- Left and Right hand exit available

INCLUSIONS

- 1 x Plate rack 500mm x 500mm
- 1 x Flat rack 500mm x 500mm
- 1 x Cutlery container
- 1 x Drain hose
- 1 x Water connection hose
- 1 x Operating manual

TECHNICAL DATA

| Height | |
|---------------------|--------------|
| Cabinet | 1420 mm |
| Cabinet inc. legs | 1585-1645 mm |
| With door extended | 2055-2115 mm |
| Usable Wash | 430 mm |
| Width | |
| Cabinet | 1150 mm |
| Depth | |
| Cabinet | 775 mm |
| Capacities | |
| Loads/Hour | up to 120* |
| Water per cycle | 160L/hr |
| Wash Pump | 1500W |
| Rinse Pump | 200W |
| Wash Tank Litres | 70 |
| Rinse Tank Litres | 17 |
| Element (wash) | 10500W |
| Element (rinse) | 9500W |
| Detergent Injection | no |
| Rinse Aid Injection | no |

Temperatures

| | |
|-----------------|-------|
| Wash Degrees C | 60 °C |
| Rinse Degrees C | 82 °C |

Plumbing

| | |
|-------|--------------|
| Drain | Gravity |
| Water | ¾" BSP (hot) |

Electrical

| | |
|----------------|---------------|
| Volts/Hz/Phase | 400V/50Hz/3+N |
| Amps | 40Amps/Ph |

* Subject to incoming water temperature

